

HCH-7006-CHG

Six-Bay MC70-Li Battery Charger

Charger Specifications:

Temperature Limits:

Operating Range: 0°C to +40°C

Storage Range: -40°C to +85°C

Dimensions:

Width: 6.25 inches (159 mm)

Length: 7.75 inches (165 mm)

Height: 2.2 inches (66 mm) - without
batteries or devices inserted.

Weight: 1.2 pounds (0.54 Kg)

Warranty:

Each charger is guaranteed
to be free from defects in
materials and workmanship
for 24 months from date of
shipment under normal use.



Compatible Batteries:

HMC70-Li(22) Honeywell® Battery

HMC70-Li(36) Honeywell® Battery


HMC70-Li(48) Honeywell® Battery

- Highest quality cells used.
- Longer cycle life.
- Extremely rugged.
- Rigorous testing.



Trademarks are the sole property of their respective owners.

12.01.24

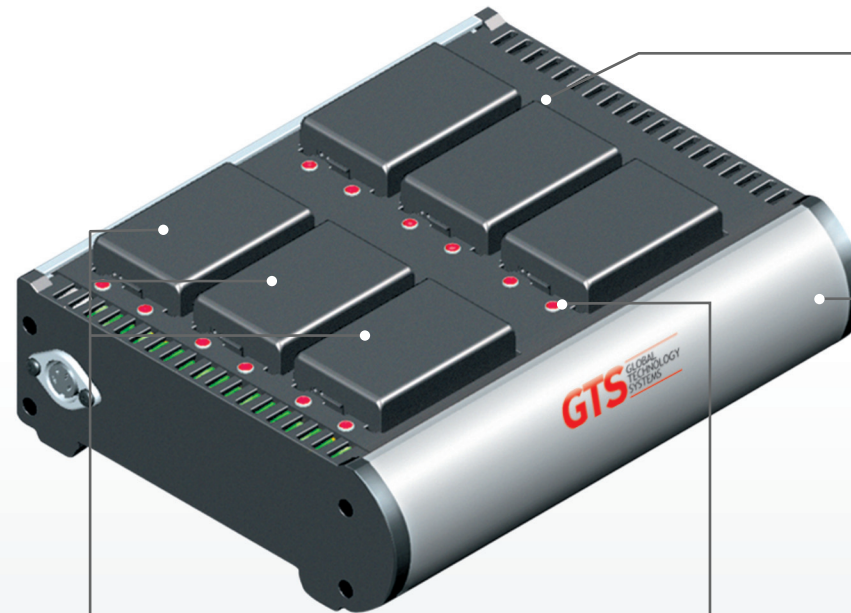

Dual-chemistry charger

Supports Li-Ion and Li-Polymer
chemistries.

Hassle-free mounting

Utilizes same mounting bracket as
Symbol® chargers for easy wall mounting.

Made of highly rugged aerospace
grade aluminium housing.

Includes power supplies, cables
& in vehicle mounting kit.

More charging in less space

Charges 50% more batteries in
same space as OEM charger.

Tri-color charging indications

A charging LED indicates charging status.

